

## SERIES

AC1000


## AVAILABLE OPTIONS

Electric Heated

## MODELS

79E21, 79E32, 79E43

## OVERVIEW

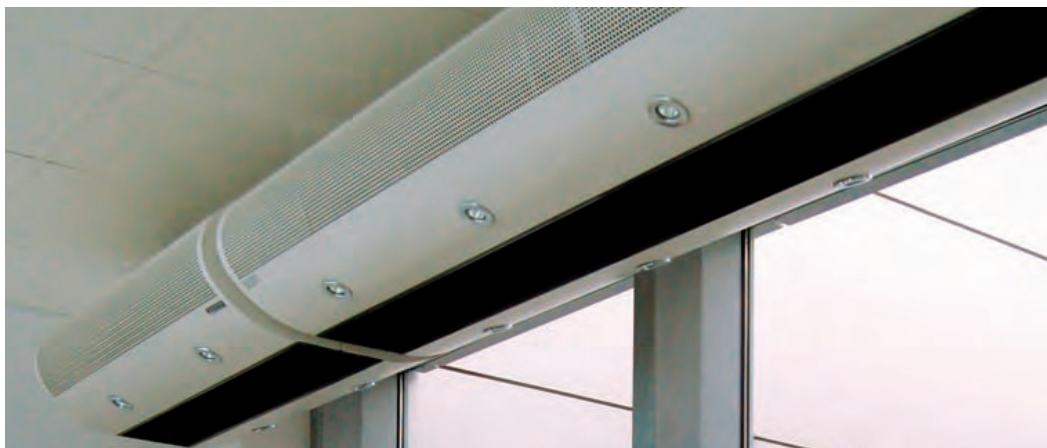

Series 1000 – higher powered decorative model, available only in 79', complete with halogen lighting. Suitable for office, retail or condominium environments, for installation up to 11' (3.5 m) in height. Available in polished or matte finished

stainless steel. Combination of an energy saving air curtain, and in addition will provide illumination in the lobby, entranceway or vestibule. Can be flush mounted or suspended.




Each Control Panel can control:  
1 – 79W, 79A, 79E

Other Control Panels available by special order  
Mixing units for water heated units available as optional



## Electric Heated



Air Flow

### GENERAL CHARACTERISTICS

MODEL		79E21	79E32	79E43
Power	V/PH/Hz	208/3/60		
Output	kBTU/h	73.4	109.9	146.8
	kW	21.5	32.2	43.0
Air Volume	cfm	4000	4000	4000
	m³/h	6800	6800	6800
Max. Door Height	ft	11.5		
	m	3.5		
Heating	°F	64.5	79	81
	°C	18	26	27
Length	ft	6.6	6.6	6.6
	mm	2000	2000	2000
Dimensions	in	26.97 x 14.57 x 80.71		
	mm	685 x 370 x 2050		
Weight	lb	256	256	256
	kg	116	116	116
Motor Input	hp	0.544	0.544	0.544
	W	680	680	680
Max Current	A	63.2	94	120
Sound Level at 5 m (distance)	dB(A)	57	57	57